

Inspection hatches, type-tested in compliance with Directive 2013/53/UE


OSCULATI


Inspection hatch with cover, CE approved

Antiskid **watertight** surface, recess hole with swivelling hollow flat.

It can be installed on any sports craft, boat design category A, B, C, and D, area II a, III, IV, watertightness degree 2.

white	Cream RAL 9001	Black	grey	Max external Ø mm	Passage mm	Recess Ø mm	hole spacing mm
20.840.00	20.840.40	20.840.50	20.840.60	265	190	215	242
20.844.00	-	20.844.50	-	315	240	270	290



CE APPROVED
based on
UNI EN ISO 12216:2004

OSCULATI


Hatch fitted with hidden screws and cam cover locking


Code	Max external Ø mm	Inside Ø mm	Recess mm
20.845.00	325	240	290



Easy opening inspection hatches

Screw locking, **watertight**, equipped with rubber O-RING; fitted with ridge for easy opening (non flush).

Code	Ø external mm - A	Ø opening mm - B	Colour
20.201.00	145	100	☐ white
20.202.00	170	127	☐ white
20.203.00	206	155	☐ white

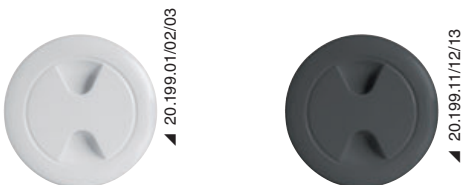

Polypropylene Inspection hatches, fitted with hidden mounting screws

Screw-locking, 100% watertight, equipped with rubber O-RING

white	Black	External Ø mm	Ø opening mm
20.199.01	20.199.11	160	102
20.199.02	20.199.12	182	127
20.199.03	20.199.13	220	152



Stylish and practical EC type-approved inspection hatch.

Screw turning lock, 100% **watertight**, fitted with rubber O-RING.

In polypropylene			Transparent with white ring	External Ø mm	Ø opening mm
white	Black	grey RAL 7042			
20.204.00	20.204.20	20.204.30	20.204.01	147	102
20.206.00	20.206.20	20.206.30	20.206.01	172	125
20.205.00	20.205.20	20.205.30	20.205.01	205	152
20.207.00	20.207.20	20.207.30	20.207.01	260	203



20.205.20;20.204.20;
20.206.20;20.207.20



20.205.30;20.204.30;2
0.206.30;20.207.30

CE APPROVED
based on
UNI EN ISO 12216:2004