


## Safety harnesses and tethers high-tech



### Ultra-light safety belt

It can be put on quickly with no possibility of error since it can be worn upside down or left on right thus protecting the operators.


Code	Size	Reference legislation
23.154.01	Universal	EN1095/ISO12401

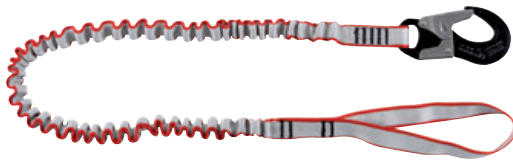

### Safety lines double lark's head knot elastic safety line

Aluminium/stainless steel anti-grip quick-opening snap hook. Unlike regular lark's head knots that become loose and bulky, the double lark's head knot remains compact and cannot slide on itself. The connection with the double wolf's mouth, unlike the normal wolf's mouths that can become loose and bulky, remains compact without the possibility of sliding on itself.

Code	Length m	Reference legislation
23.154.05	2	EN1095/ISO 12401

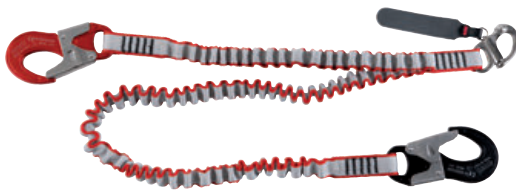

### Y-shaped umbilical cord

With quick release stainless steel snap hook and anti-grip quick-opening aluminium/stainless steel terminal snap hooks.

This tether has red snap hooks for the 1-m arm and black snap hooks for the 2-m arm so you'll immediately know the arm length.

The difference in colours on the lanyard allows one to quickly discern the arm's length.

Code	Length m	Reference legislation
23.154.09	2+1	EN1095/ISO 12401



### Jackstay (Lifeline)

#### SHOCK ABSORBER

Adjustable lifeline with energy absorber via the buckle sliding and the controlled stretching of the belt up to 8%.

Code	Length m	Reference legislation
23.154.11	8 to 15	EN795/C
23.154.12	15 to 29	EN795/C

