

Manual winches and accessories




Boat haulage winch

Chromed-zinc steel body, high-resistance **hardened steel** pinions, self-lubricating bushing, reinforced handles, **stainless steel springs**, **cased gearing**. Black epoxy powder coated. CE certified by TÜV.

The maximum traction load refers to the use with only one cable turn on the drum.

Code	Max pull kg	Ratio	Cable capacity m	Speed	Gear	↔ mm
02.800.00	350	3.2:1	33 (Ø 3 mm) / 14 (Ø 5 mm)	Single	Forward and idle	95x94
02.100.00	450	4:1	24 (Ø 5 mm) / 13 (Ø 8 mm)	Single	Forward and idle	140x88
02.120.00	540	4:1	24 (Ø 5 mm) / 13 (Ø 8 mm)	Single	Forward, idle, reverse	140x88
02.140.00	630	4:1	24 (Ø 5 mm) / 13 (Ø 8 mm)	Single	Forward, idle, reverse	140x88
02.150.00	727	4:1	24 (Ø 5 mm) / 13 (Ø 8 mm)	Single	Forward, idle, reverse	138x89
02.200.00	900	4:1 and 10:1	30 (Ø 5 mm) / 15 (Ø 8 mm)	double	Forward, idle, reverse	175x125
02.250.00*	1125	5:1 and 12:1	30 (Ø 5 mm) / 15 (Ø 8 mm)	double	Forward, idle, reverse	175x125

* Fitted with quick manual brake.

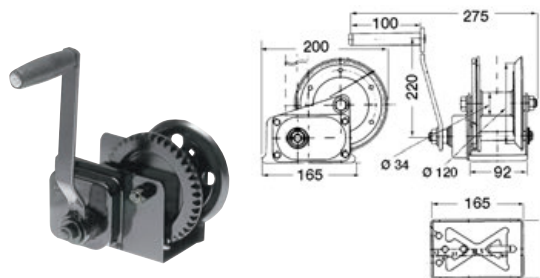

Boat haulage winch with clutch

Chromed-zinc steel body, high-resistance hardened steel pinions, self-lubricating bushings, reinforced handles, stainless steel springs, faired gearing. Brake Winch version **with automatic break and clutch**; without the pawl, the drum stays still and releases the handle. CE certification by TÜV.

The maximum traction load refers to the use with only one cable turn on the drum.

Code	Max pull kg	Ratio	Max capacity m	↔ mm
02.252.00	630	4:1	22 (5-mm Ø)	165x92


OSCULATI




Boat haulage winch with technopolymer external case

Epoxy-powder coated steel frame, hardened steel pinions, self-lubricating bushings, reinforced handles, steel springs. CE certified by TÜV.

Code	Max pull kg	Ratio	Cable capacity m	Speed	Gear
02.120.01	540	4:1	24 m (Ø 5 mm) / 13 m (Ø 8 mm)	Single	Forward, idle, reverse
02.140.01	630	4:1	24 m (Ø 5 mm) / 13 m (Ø 8 mm)	Single	Forward, idle, reverse

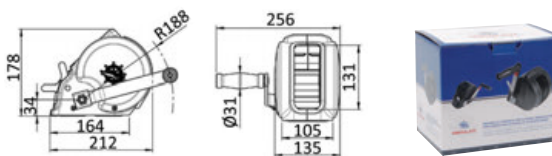

ROCK®

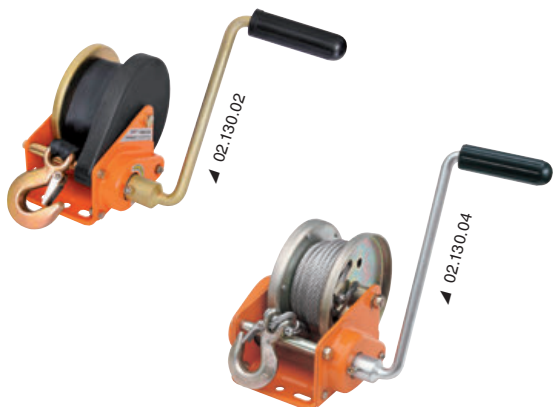

ROCK winch with automatic lock

The self-locking device (working with a minimum load of 25 kg) allows a safe use of the winch. Epoxy-powder coated galvanized chromed steel body.

Code	Max pull kg	Ratio	Cable capacity m	Accessories INCLUDED
02.130.02*	680	5.08:1	17 m of 5-mm Ø steel cable	6 m of tape + snap hook
02.130.04	1135	11:1	20 m of 6-mm Ø steel cable	10 m of 6-mm steel cable + snap hook

* With safety cover on the gears

