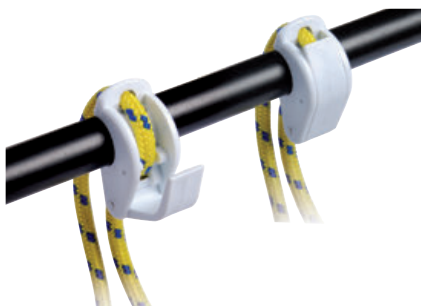## FENDER FLUTES

Device made of **white nylon** and used to fit and adjust the height of fenders, **without knots**. A rope of diameter 8mm should be used on the fenders.

Code	For Railing mm	For Dragllie mm
33.107.00	Tubes 22/25	cable 6/8

Removable fender hooking device

AISI 316

OSCULATI

Fenders can be placed and removed in a matter of seconds. Mirror-polished AISI316 stainless steel.

Code	For ropes mm	Ring Ø mm	I←→I mm
33.105.00	8/12	25	31x77x55H

Rapid Lock system for fenders and bimini tops

AISI 316   **FLUSH**

OSCULATI

Quick coupling/release system for fast fastening of fenders, Bimini tops, etc.
Made of AISI316 stainless steel. When not in use, the recess base is flush with the surface.
Fitted with Dyneema ring for fastening to the fender/Bimini top.

Polished SS version	Black SS version	Description	I←→I mm
39.840.00	39.840.60	Base Rapid Lock	Ø 33 x 53 h
39.840.01	39.840.61	Removable part	Ø 39 x 30 h
39.840.10	39.840.10	Loop ring grey Dyneema	Ø 7
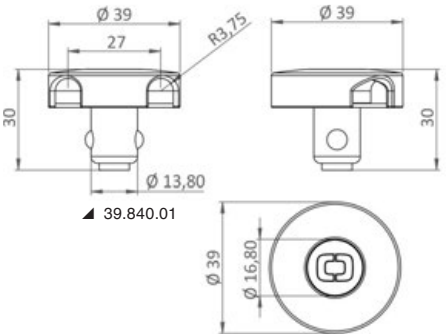
Leather hooking device for fenders

Removable hooking device for fenders.
Outer leather coating, it fits all handrails or tubular up to 50mm diam.
Inner woollen lining to prevent both slipping and scratching.
Wide hook&loop fasteners to close the end part.
A cam cleat fitted with polished stainless steel toothed Delrin side cheeks, suitable for 10- to 14-mm diameter ropes, adjusts the fender height whenever necessary.
Two stainless steel plates are placed inside to ensure a firm and secure fastening of the cam cleat and improve the aesthetic look of the device.
Stainless steel ring to let the rope through.
Leather colours, accessory inside lining and dimensions are customizable for quantities greater than pcs. 6.

Code	Length (open) cm	Width cm	Finish
33.101.00	45	14	Leather color outside, inner lining made of black wool

Leather colours, accessory inside lining and dimensions are customizable for quantities greater than pcs. 6.