

Electric winches and windlasses trailers and garage tenders

LEWMAR®


LEWMAR Captive CRW400 captive reel windlass

AISI 316

The CRW400 windlass represents a stepchange in engineering and design for small boat windlasses. Built around a stainless steel chassis with composite bearing technology and robust UV-stabilised ABS shell, the CRW400 is salt-water resistant and suitable for boats up to 9 m.



Code	Motor		Line Ø mm	Maximum length of extension/recovery m	Max pull kg	Maximum recovery speed m/min	Current draw A	Max. anchor weight kg	↔ mm	kg
	V	W								
02.537.01	12	400	6	35	275	25	15	16	365 x 303 x 188 (h)	10

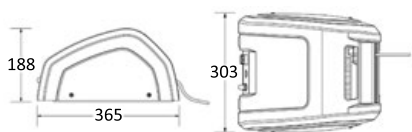

LEWMAR®

TW650 tender garage winch

Black anodized aluminium frame for longer durability and optimum protection against the harsh marine environment.

The ABS motor cover is waterproof to IP68 standards.

The kit includes: winch, single solenoid, circuit breaker and line.

The TW650 is C.E. certified according to UNI EN 28846:2002 protection against the ignition of flammable gases in surrounding areas - EN28846.



Code	Motor		Max pull kg	Line speed m/min		8 mm rope	Maximum A current consumption	Recommended circuit breaker A	(excluding the rope) kg
	V	W		exhaust	Max load				
02.617.24	24	1000	750	14	8	9 m	41.67	50	8.8

