



## Lever latches

### Anti-vibration peak latch

With eccentric lever lock, made of **elastic thermorubber**, fitted with mounting plate and **stainless steel** hook.


| Code      | Colour | ←→  mm |    |    |    |     |     |
|-----------|--------|--------|----|----|----|-----|-----|
|           |        | A      | B  | C  | D  | E   | F   |
| 38.200.00 | white  | 96/106 | 31 | 29 | 22 | 118 | 129 |
| 38.200.01 | Black  | 96/106 | 31 | 29 | 22 | 118 | 129 |



### Locker anti-vibrating lock with stainless steel cover

With eccentric lever lock. Made of elastic thermo-rubber with mirror-polished stainless steel front. 6-mm spring travel.


| Code      | ←→  mm |    |    |    | Lockhole Eyelet |
|-----------|--------|----|----|----|-----------------|
|           | A      | B  | C  | D  |                 |
| 38.200.10 | 95     | 19 | 30 | 12 | no              |
| 38.200.11 | 95     | 19 | 30 | 12 | Yes             |



### Locker latch

Made of technopolymer with padlock holder. Opening/closing fit with antivibration hidden snap spring.



| Code      | ←→  mm |    |      |
|-----------|--------|----|------|
|           | A      | B  | C    |
| 38.208.50 | 111    | 40 | 17.5 |




### Stainless steel toggle fastener suitable for trunks and hatches

3.2-mm Ø fastening bores.

| Code      | Version             | Length mm | Max pull kg | Max load kg |
|-----------|---------------------|-----------|-------------|-------------|
| 38.203.00 | Standard            | 102       | 150         | 55          |
| 38.203.01 | With padlock holder | 102       | 150         | 55          |

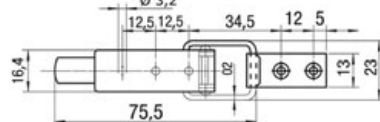


### Stainless steel toggle fastener lockable

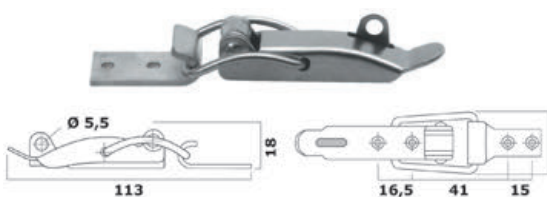

| Code      | Length mm | Max pull kg | Max load kg |
|-----------|-----------|-------------|-------------|
| 38.206.01 | 113       | 250         | 100         |

### Locking with adjustable stainless steel lever

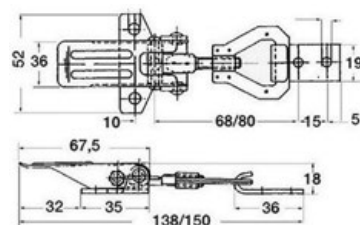

High strength model.

| Code      | Max load kg | Max Load Tension kg |
|-----------|-------------|---------------------|
| 38.210.00 | 110         | 250                 |