

Mini gas spring

Made of **stainless steel**, designed to lift small hatches or kitchen furniture.

Code	Open measure mm	Stroke mm	Thrust kg
38.008.00	144	38	5



Telescopic hatch stay

Suitable for **nylon** portholes and hatches, fitted with **stainless steel** sliding rod; this special sliding system ensures an extraordinary locking and a remarkable travel at the same time.

Code	Stroke mm
38.191.60	220/480



Ready to be used with plates 38.013.00; 38.013.01 included on the drawing..



38.013.01 OPTIONAL Plates sold separately.



38.013.00 OPTIONAL Plates sold separately.



Soft Down Stay - upward window stay

Once the hatch is raised, the bracket keeps it under position, when is closed the bracket dampens the descending until the door is completely closed; colour: white, includes mounting plate, torsional moment calculation: **bracket**: door length (cm) x 1/2 x door weight (kg).

Code	For cabinet doors	Mounting plate
48.610.00	90° opening	Included

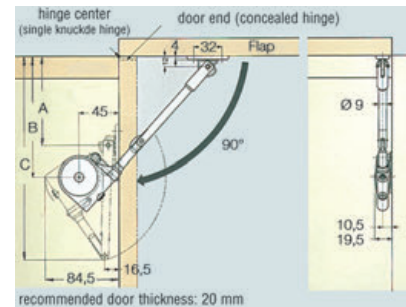

SUGATSUNE Soft Down Stay for opening downwards


Version with stopper. For doors **opening downwards**.

Soft-opening door (right or left opening).

The door has a **stopper** for **closed** position.

Torque calculation. Arm: length of door (cm) x 1/2 x weight of door (kg).

Code	Colour	Torque
38.611.01	Black	0.49 - 1.18 N•m (5 - 12 kgf•cm)
38.611.02	white	0.49 - 1.18 N•m (5 - 12 kgf•cm)
38.611.03	Black	1.62 - 3.68 N•m (16.5 - 37.6 kgf•cm)
38.611.04	white	1.62 - 3.68 N•m (16.5 - 37.6 kgf•cm)

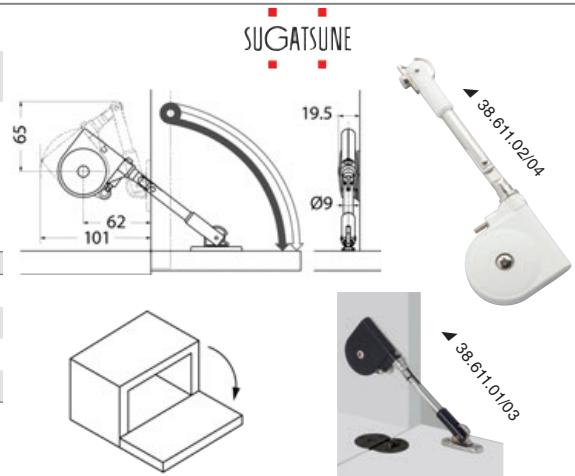

New

Hinge with integrated damper


Hinge with integrated damper to prevent lid closure

For doors opening upwards.

Side-mount type. Sold in pairs (DX+SX).

Includes countersunk self-tapping screws 4x20mm.

Code	Colour	Torque
38.613.01	Black	3.4 - 5 N•m (34.7 - 51 kgf•cm)



SUGATSUNE

