



Hinges 1.7 mm thickness

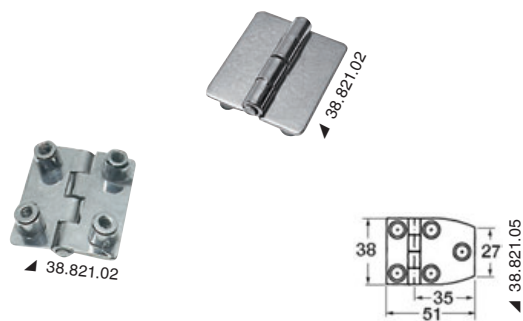

1.7-mm hinges

Made of **stainless steel without screws**, thickness of 1.7 mm, fitted with female bushing, threaded 4MA, welded under the hinge at the same position of the passing holes.

Code	l mm	Shape	N° bushings
38.821.01	51x38	Rectangular	4
38.821.02	51x45	Rectangular	4
38.821.05	51x38	Trapezoidal	6

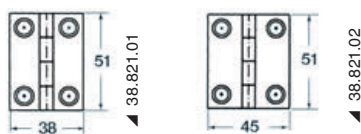

1.7-mm hinges

Low-cost version, made of **stainless steel**, electrolytically polished finish.

Code	l mm
38.491.30	51,5x38
38.491.00	70x38



1.7-mm hinges

Made of modelled **mirror polished stainless steel**, thickness of 1.7 mm.


Code	l mm
38.467.90	101x27
38.467.89	101x38



Hinges 2 mm thickness

OSCOLATI


Hinges 2 mm thickness

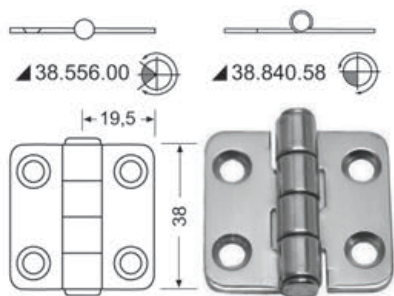

Made of mirror polished stainless steel. Vibration damping by means of a braked central axle.

Code	l mm	Model
38.840.58	38x39	Protruding knot
38.556.00	38x39	Semi-recessed


Hinges 2 mm thickness

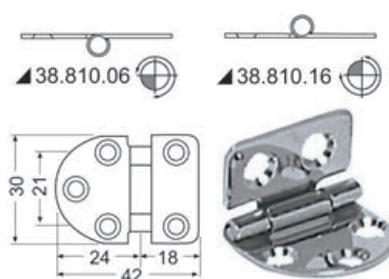

Made of mirror polished stainless steel. Vibration damping by means of a braked central axle.

Code	l mm	Model
38.810.16	42x30	Protruding knot
38.810.06	42x30	reversed pin


Hinges 2 mm thickness

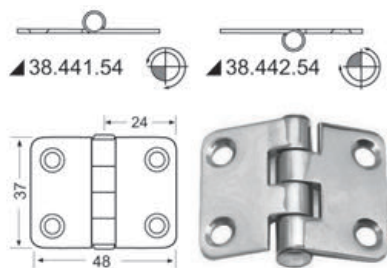

Made of mirror polished stainless steel. Vibration damping by means of a braked central axle.

Code	l mm	Model
38.441.54	48x37	Protruding knot
38.442.54	48x37	reversed pin


Hinges 2 mm thickness



Made of mirror polished stainless steel. Vibration damping by means of a braked central axle.

Code	l mm	Model
38.817.50	54x39	Protruding knot

Hinges 2 mm thickness

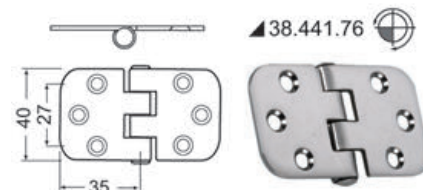

Made of mirror polished stainless steel. Vibration damping by means of a braked central axle.

Code	l mm	Model
38.441.76	70x39	reversed pin