

Lift and turn latches

Pull latch

Made of nylon + chromed brass; for mounting with 2 crews on boards, thickness of 6-16 mm, fitted with snap-in stopper.

Code	Size mm	Hole in the floorboard mm	Stop stroke mm
38.137.00	63x63	50	27-50



Flush turn latch for winch handle

AISI 316


REGISTERED DESIGN / DISEGNO DEPOSITATO

Completely flush when not in use thanks to a spring system that closes the star hole. 90° rotation. Made of AISI 316 stainless steel.

Code	External Ø mm	Bore Ø mm	Bulkhead thickness mm	Stop stroke mm
38.165.01	51	42	4-26	32-130



38.152.78 OPTIONAL Pushbutton KEY

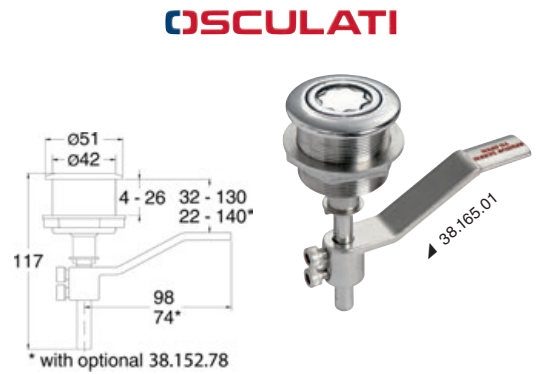

Pull handle with pulling system

Made of **chromed brass**, recess fit, fitted with locking cover. Fitted with lower adjustable stopper height from 50 mm to 5 mm.


Code	Recess Ø mm	Version	Stop stroke mm
38.140.02	68	With lock	38-58
38.140.03	68	without key	38-58



Pull latch

Made of **mirror polished AISI 316 stainless steel**, fitted with counter stop plate; no visible screws; special **pulling** system which turns the handle to **completely lock** the bottom boards, thus avoiding vibrations, supplied with angled locking lever + straight lever + stop plate.

Code	Ø A mm	Ø B mm	C mm	D mm	E mm	L mm	H mm
38.426.80	70	60	30/80	78	2/42	71	22
38.426.86	90	70	30/80	88	2/49	71	22

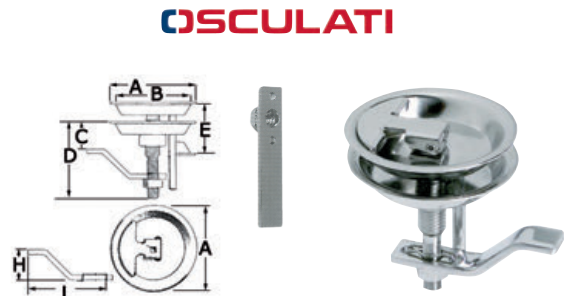

Lift and turn latch with cover

AISI 316

Made of **precision cast mirror polished AISI 316 stainless steel**; adjustable fixing board; built-in padlock ring.

Code	A mm	B mm	C mm	D mm	E mm	F mm	Base mm
38.151.00	115	120	92	52-65	11	75	110x115

