

## De Luxe U-bolt for conic fittings.

AISI 304

Made of mirror-polished stainless steel.

| Code      | D mm | L1 mm | L2 mm | L3 mm | B mm | C mm | Breaking load kg |
|-----------|------|-------|-------|-------|------|------|------------------|
| 39.127.01 | 9.5  | 100   | 63    | 27.5  | 26.1 | 35.7 | 7826             |
| 39.127.02 | 9.5  | 120   | 83    | 27.5  | 26.1 | 35.7 | 7826             |
| 39.127.03 | 9.5  | 110   | 63.5  | 35    | 26.1 | 35.7 | 7826             |
| 39.127.05 | 12.5 | 122   | 76    | 34    | 34   | 46   | 9000             |
| 39.127.06 | 12.5 | 136   | 90    | 34    | 34   | 46   | 9000             |
| 39.127.10 | 12.5 | 166   | 120   | 34    | 34   | 46   | 9000             |
| 39.127.07 | 12.5 | 131   | 76.2  | 41    | 34   | 46   | 9000             |
| 39.127.09 | 15.8 | 167   | 91    | 50    | 45   | 58   | 11000            |
| 39.127.14 | 15.8 | 207   | 130   | 50    | 47.5 | 60   | 11000            |


OSCU LATI



## U bolt made with rod

Made of AISI304 stainless steel.

| Code      | A mm | B mm | C mm | D mm | E mm | M mm | ORDER BY BOX | Breaking load kg |
|-----------|------|------|------|------|------|------|--------------|------------------|
| 39.126.01 | 45   | 12   | 30   | 30   | 60   | M4   | 10           | 1100             |
| 39.126.02 | 50   | 13   | 40   | 36   | 80   | M5   | 10           | 1900             |
| 39.126.03 | 50   | 15   | 40   | 36   | 90   | M6   | 10           | 2700             |
| 39.126.04 | 50   | 15   | 40   | 36   | 80   | M8   | 10           | 4000             |
| 39.126.05 | 70   | 20   | 55   | 52   | 90   | M10  | 10           | 6600             |
| 39.126.06 | 83   | 23   | 65   | 62   | 150  | M12  | -            | 11000            |

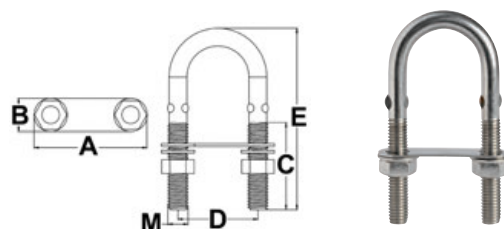


## U-bolt with self-gripping safety nut

AISI 316

Made of stainless steel.

| Code      | D1  | L1 mm | L mm | D mm | A mm |
|-----------|-----|-------|------|------|------|
| 39.123.01 | M8  | 60    | 100  | 10   | 40   |
| 39.123.02 | M10 | 48    | 100  | 12   | 40   |
| 39.123.03 | M12 | 58    | 120  | 14   | 50   |

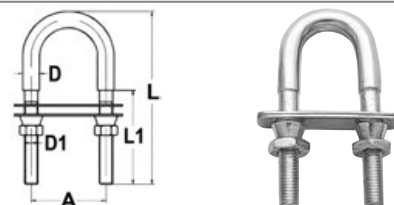

## Eyebolts and rings

## Towing/hoisting rings

AISI 316

Made of mirror polished AISI316 stainless steel.

| Code      | A mm | B mm | C mm | D Ø mm | Fixing with    |
|-----------|------|------|------|--------|----------------|
| 39.200.01 | 38   | 35   | 15.6 | 21     | 2 x 5-mm studs |
| 39.200.02 | 50   | 45   | 19.7 | 30     | 2 x 8-mm studs |



## Pulling/holding ring



Made of chromed bronze.

| Code      | Pin mm | g   |
|-----------|--------|-----|
| 39.119.00 | 10x90  | 210 |

## Pulling/holding ring



Made of chromed bronze, fitted with two studs.

| Code      | base mm |
|-----------|---------|
| 39.118.00 | 100x43  |

## Bow or stern ring, made of polished stainless steel AISI 316

| Code      | Stud from mm | Working load kg |
|-----------|--------------|-----------------|
| 39.116.00 | 10           | 1100            |



## Stainless steel spring-locking ring



Code 39.147.00

Designed as hook for water-ski line haul, dinghies or small boats; sturdy and practical.

## Multi-purpose ring



AISI 316 stainless steel.

| Code      | Base mm | Overhang mm |
|-----------|---------|-------------|
| 39.301.07 | 30x27   | 28          |