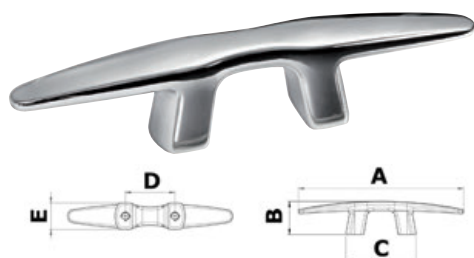


**OSCULATI****Camel cleat****AISI 316**Stud mounting, made of **mirror-polished AISI316 stainless steel**.

| Code      | Length mm | Centre distance mm | Stud Ø mm | Breaking load kg | OPTIONAL stainless steel base |
|-----------|-----------|--------------------|-----------|------------------|-------------------------------|
| 40.133.15 | 150       | 45.4               | 6         | 1866             | 40.133.50                     |
| 40.133.20 | 200       | 59.6               | 8         | 2682             | 40.133.51                     |
| 40.133.25 | 250       | 76.3               | 10        | 5741             | 40.133.52                     |
| 40.133.30 | 300       | 91.8               | 12        | 7613             | 40.133.53                     |

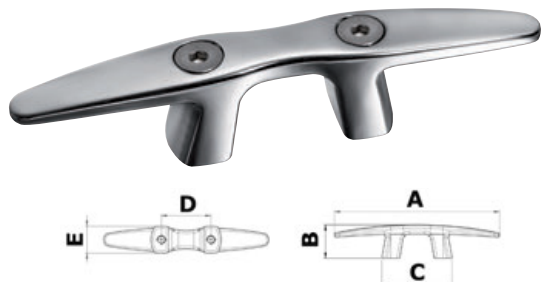
**OSCULATI****Reinforcement/finishing base for Camel cleats****AISI 316**

| Code      | mm     | For bollards |
|-----------|--------|--------------|
| 40.133.50 | 25x65  | 40.133.15    |
| 40.133.51 | 35x90  | 40.133.20    |
| 40.133.52 | 50x110 | 40.133.25    |
| 40.133.53 | 60x140 | 40.133.30    |

**OSCULATI****Silhouette cleat****AISI 316****REGISTERED DESIGN / DISEGNO DEPOSITATO**

Mirror-polished AISI316 stainless steel.

| Code      | A mm | B mm | C mm  | D mm | E mm | Ø studs |
|-----------|------|------|-------|------|------|---------|
| 40.150.15 | 150  | 30.5 | 63.5  | 45   | 24.5 | M8      |
| 40.150.20 | 200  | 40   | 85    | 60   | 32.5 | M10     |
| 40.150.25 | 250  | 50   | 106.5 | 75   | 40.5 | M12     |
| 40.150.32 | 320  | 64   | 136   | 96   | 52   | M14     |
| 40.150.38 | 380  | 76   | 161.5 | 114  | 61.5 | M16     |

**Silhouette cleat with bores****AISI 316**


Mirror-polished AISI316 stainless steel.

| Code      | A mm | B mm | C mm  | D mm | E mm | Through bolt Ø mm |
|-----------|------|------|-------|------|------|-------------------|
| 40.153.15 | 150  | 30.5 | 63.5  | 45   | 24.5 | 8                 |
| 40.153.20 | 200  | 40   | 85    | 60   | 32.5 | 10                |
| 40.153.25 | 250  | 50   | 106.5 | 75   | 40.5 | 12                |
| 40.153.32 | 320  | 64   | 136   | 96   | 52   | 14                |
| 40.153.38 | 380  | 76   | 161.5 | 114  | 61.5 | 16                |

**OSCULATI****Bull Dog cleat****AISI 316**

Made of mirror-polished AISI316 stainless steel, stud mounting.

| Code      | A mm | B mm | C mm | D mm | E mm | Stud Ø mm | Breaking load kg | Recommended studs | White plastic base OPTIONAL |
|-----------|------|------|------|------|------|-----------|------------------|-------------------|-----------------------------|
| 40.131.16 | 158  | 35   | 74   | 53   | 49   | 8         | 4497             | 40.142.09         | 40.131.40                   |
| 40.131.20 | 205  | 44   | 94   | 64   | 62   | 10        | 6106             | 40.142.11         | 40.131.41                   |
| 40.131.25 | 255  | 54   | 118  | 80   | 76   | 10        | 7051             | 40.142.11         | 40.131.42                   |
| 40.131.30 | 305  | 65   | 127  | 90   | 82   | 14        | -                | 40.142.14         | -                           |

**Bull Dog cleat - Black line****AISI 316**

Made of polished stainless steel with a surface coating that integrates a black layer in the steel cleat whose surface becomes extremely hard and corrosion-resistant.

| Code      | A mm | B mm | C mm | D mm | E mm | Stud Ø mm | Recommended studs |
|-----------|------|------|------|------|------|-----------|-------------------|
| 40.131.56 | 158  | 35   | 74   | 53   | 49   | 8         | 40.142.09         |
| 40.131.57 | 205  | 44   | 94   | 64   | 62   | 10        | 40.142.11         |

