

White plastic base for Bull Dog cleats

Help prevent possible oxide filtering and give a better look to the cleats


Code	For bollards
40.131.40	40.131.16
40.131.41	40.131.20
40.131.42	40.131.25

Nordik cleat


AISI 316

Made of mirror-polished AISI316 stainless steel, 2-stud mounting.


Code	A mm	B mm	C mm	D mm	E mm	Stud Ø mm	Breaking load kg
40.137.01	150	45	90	47	30	8	4324
40.137.02	205	55	120	69	35	10	5058
40.137.03	265	70	150	83	40	12	5007
40.137.04	310	80	160	83	50	16	7246
40.137.05	310	80	200	83	85 w. basis oval	16	7791
40.137.06	360	90	198	100	60	16	8606
40.137.08	500	120	280	155	85	16	8984

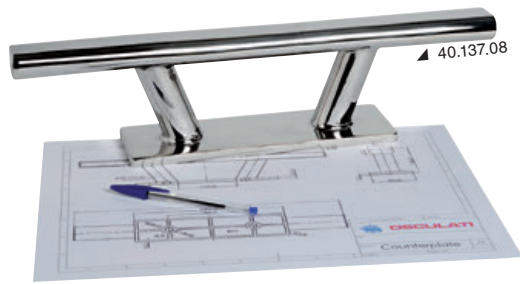

▲ 40.137.04



▲ 40.137.05



▲ 40.137.06


OSCULATI



▲ 40.137.03



▲ 40.137.05



Nordik cleat - Black Line

AISI 316

Made of stainless steel with a surface coating that integrates a black layer in the steel cleat whose surface becomes extremely hard and corrosion-resistant.

Code	A mm	B mm	C mm	D mm	E mm	Stud Ø mm
40.137.51	150	45	90	47	30	8
40.137.52	205	55	120	69	35	10
40.137.53	265	70	150	83	40	12




Nordik II precision-cast Cleat

AISI 316

REGISTERED DESIGN / DISEGNO DEPOSITATO

Mirror-polished, stud mounting.

Code	A mm	B mm	C mm	D mm	E mm	Stud Ø mm
40.149.15	150	39.5	91.5	51	25	8
40.149.20	203	54	124	69	33	10
40.149.25	250	66	152.5	83	41.5	12



OSCULATI




Skandy cleat

AISI 316

Made of mirror-polished AISI316 stainless steel, 2-stud mounting.

Code	A mm	B mm	C mm	D mm	Stud Ø mm	Breaking load kg
40.148.14	145	30	28	48	8	-
40.148.19	190	40	36	70	10	4817
40.148.24	240	47	45	79	12	6889



OSCULATI



▲ 40.148.24



▲ 40.148.19