






Fender profiles

Made-in-Italy AISI316 stainless steel C-shaped fender profiles. 3-m standard length, tapered and mirror-polished. Each bar is pickled and passivated for optimum resistance in salty environment. They can be used with dedicated UV-resistant PVC base plates available in white, black and grey, and with dedicated mirror-polished AISI316 stainless steel terminals.



Code	Description	Bore type	 mm			Bars m	Bore centre distance	 White PVC base	 Grey PVC base	 Black PVC base	SS end cap
			A	B	H						
44.480.20	Profilo 20	flared	19	1.5	4.6	3	198	44.481.33	44.481.43	44.481.53	44.484.33
44.477.20	Profilo 20	deep-drawn	19	1.5	4.6	3	186	44.481.35	44.481.45	44.481.55	44.484.35
44.480.30	Profilo 28	flared	28	1.5	7	3	198	44.481.36	44.481.46	44.481.56	44.484.36
44.480.38	Profilo 35	flared	35	1.5	9	3	198	44.481.37	44.481.47	44.481.57	44.484.37

▲ 44.481.xx

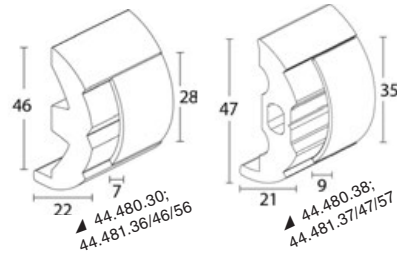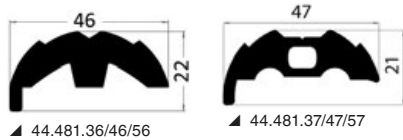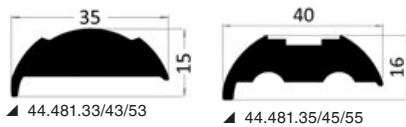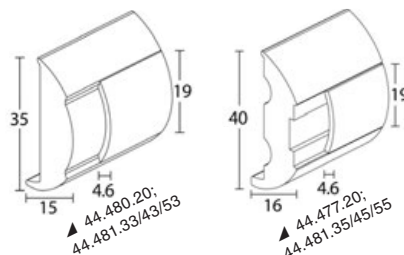

AISI 316

Code	Width (A) mm	Height (B) mm	Weight g /m	Rods m	hole spacing mm	Bore Ø mm	Countersink Ø mm
44.479.10	10	3.5	250	3	185	3.5	5.75
44.479.15	14	4	410	3	185	4.25	7.5
44.479.20	20	4	780	3	185	4.25	8





▲ 44.479.10 ▲ 44.479.15 ▲ 44.479.20



Code	Height mm	S.S. profile cross section mm	To combine with OPTIONAL profile	Roll m
44.480.16	30	15x5	44.480.11	24
44.480.17	35	18x5	44.480.12	24
44.480.18	40	21x5,5	44.480.13	24
44.480.19	45	25x7	44.480.14	24
44.480.21	50	30x9	44.480.15	24
44.480.22	60	40x8	-	24

