

Black one-way semirigid reinforced groove

Code 44.489.00


Suitable for sliding glasses, available in 10-metre coils, for glass sizes 4/6 mm.



STAND-PRO weather-resistant guide profiles for sliding glass panes

AISI 316 stainless steel profile, anti-friction high density polyethylene bottom, neoprene intermediate bearing and vibration dampening felt, screw mounting with the profile; side anti-sliding and vibration-dampening synthetic brushes made of UV resistant material.


Code	For glass thickness mm	Rod length m	Track	Width mm	Height mm
44.751.19	5/6.5	2.44	simple	15	15
44.751.20	5/6.5	2.44	Double	25	11.5

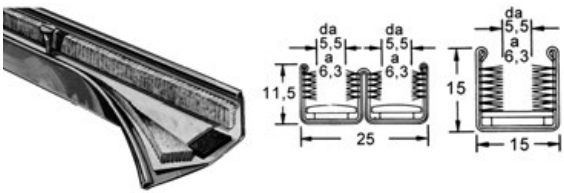

Anti-draught guide

Designed to seal sides against draught between two glasses, made of AISI 316 stainless steel.

Code	Height mm	Width mm	Length of bars m
44.751.18	17.2	14	2.44



Stainless steel hooks

Fitted with universal swivelling joint.



Code	 ORDER BY BOX
44.473.00	10



Wireway designed for mounting boat awnings, canopies and cushions using an insert

Boat awnings, canopies and cushions are fastened by means of a relinga insert.

Code	Description	Roll m	Bars m
44.010.01	Tray in white semirigid PVC for hoods and bimini tops	-	4
44.010.02	Tray in white semirigid PVC for cushions	-	4
44.010.03	6.5-mm Ø soft PVC rod for insert. To be sewn into fabric.	60	-

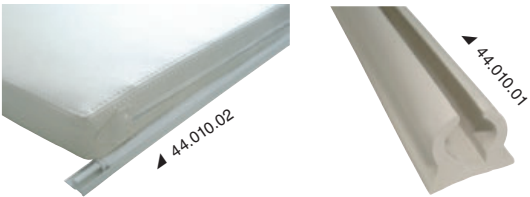

Profile designed for beading boat protection cradles

Made of flexible PVC. Grey colour.

Code	Width mm	Height mm	Roll m
44.756.85	73	16	24

