



ULTRAFLEX hydraulic steering system for outboard engines up to 300 HP

Hydraulic pump - Fitted with check valve.
For mounting flanges, see items 45.270.03; 45.270.04; 45.280.10.

Code	Initials	Mounting	Flow / revolution cc	Pistons	Pressure bar	Ø max. steering wheel mm	Fittings	kg
45.280.00	UP25F	Front	25	5	70	710	3/8"	5
45.280.01	UP28F	Front	28	5	70	710	3/8"	5
45.280.02	UP33F	Front	33	5	70	710	3/8"	5
45.280.03	UP39F	Front	39	7	70	710	3/8"	5
45.280.33	UP45F	Front	45	7	70	710	3/8"	5
45.280.04	UP33R	Rear-dashboard	33	7	70	710	3/8"	5
45.280.07	UP28R	Rear-dashboard	28	5	70	710	3/8"	5
45.280.08	UP39R	Rear-dashboard	39	7	70	710	3/8"	5
45.280.11	UP45R	Rear-dashboard	45	7	70	710	3/8"	5


45.270.08 X68 chromed flange for hydraulic pumps
45.270.07 "F" kit for easier filling up and cleaning of hydraulic pumps

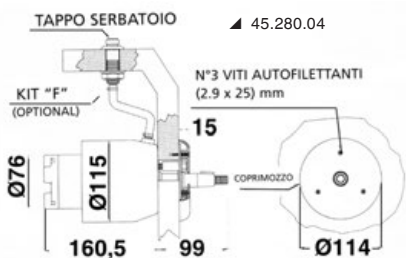

45.280.00/01/02/03/33



45.280.04/07/08/11



45.280.00/01/02/03



45.270.07



45.270.08

Hydraulic pump

Made ready for mounting kit X52 (45.038.00), wheel inclination.

Code	Initials	Pistons	Pressure bar	Capacity per revolution c.c.	Steering wheel max Ø mm	kg
45.281.01	UP28T	5	70	28	710	5
45.281.02	UP33T	5	70	33	710	5
45.281.03	UP39T	7	70	39	710	5



Kit X52

Code	Description
45.038.00	Designed to adjust and incline the steering wheel for a total of 48°



X72 kit

Code 45.040.00

It adjusts the steering wheel inclination in 5 positions up to 60°. In comparison with TILT systems 45.038.00/45.039.00, it has a dramatically reduced size since it has to be fixed to the panel and wraps the hydraulic pump.

