


Dolphin strikers and stern and bow platforms

Dolphin striker

AISI 316

Made of mirror-polished AISI316 stainless steel and real teak walking surface.
Adjustable strut.

Code	Pipe Ø mm	↔ AxBxC mm
48.471.01	32	680x395x280
48.471.05	32	750x500x330
48.471.06	40	1180x590x330




Dolphin striker with hinged bow roller for anchors

AISI 316

Made of mirror-polished AISI316 stainless steel and real teak walking surface.
Adjustable strut.




Code	Pipe Ø mm	↔ AxBxC mm
48.471.04	32	750x500x330
48.471.08	40	1180x590x330



Racing Performance dolphin striker

Heavy duty version with adjustable roller housing for anchors up to 20 kg (compatible with the most common types) and adjustable joint for gennaker/Code-0.
Ready to fit a telescopic ladder in its lower part.
Made of polished AISI316 stainless steel + teak walking surface.

Code	A mm	B mm	Tube Ø mm	For boats m	For gennaker max m²	For Code-0 max pull kg	Anchor max kg	OPTIONAL bow roller	OPTIONAL ladder
48.472.01	1050	436 ± 50	32	7.80 / 10	80	1500	11	48.472.10	48.472.30
48.472.03	1172	533 ± 50	41.5	9.60 / 12.60	115	2500	20	48.472.10	48.472.40
48.472.05	1406	590 ± 50	41.5	10.80 / 14.10	130	2500	20	48.472.10	48.472.40

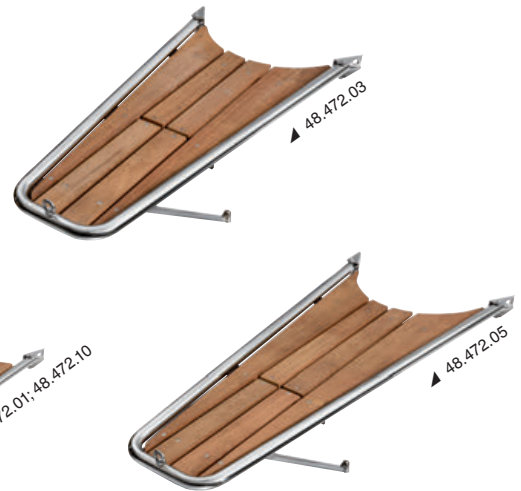

Accessories for Racing Performance dolphin striker 48.472.01/03/05

Code	Description	↔ mm				
		A	B	C	D	E (Max length)
48.472.10	Universal hinged bow roller for 11/20 kg anchors	203.4	185	247.7	-	-
48.472.30	3-step telescopic ladder for 40.472.01	409.2	300	295	65	890
48.472.40	3-step telescopic ladder for 40.472.03/05	409.2	300	284	65	890

