

Bow telescopic ladder

Made of mirror-polished AISI 316 stainless steel. The rotating arms hook to the pulpit. Technical characteristics: telescopic ladder with oval steps coated with white plastic; rotating hooking arms; telescopic strut to the bow.

Code	Steps	Ladder length mm*		Maximum width mm
		open	closed	
49.548.04	4	1100	394	315


\* Plus 250 mm of hooking arms



Rubber dinghy ladder

Made of **folding anodized aluminium**, lightweight and floating. Fitted with stainless steel **snap hook** and **rope**. For snap hook hinges please see our items 39.170.91, 39.170.92.


Code	Steps	Length mm	Width mm	Shackle INCLUDED	OPTIONAL fittings
49.533.01	2	900	250	09.187.08	39.170.91; 39.170.92
49.533.02	3	1150	250	09.187.08	39.170.91; 39.170.92

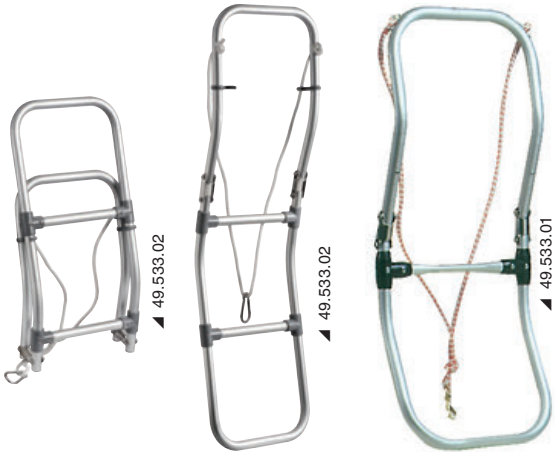

Folding rubber dinghy ladder

Made of mirror polished **stainless steel**, fitted with three steps; includes **nylon** straps and buckle for floor mounting, universal size.

Code	Length mm	Width mm
49.528.03	880	250

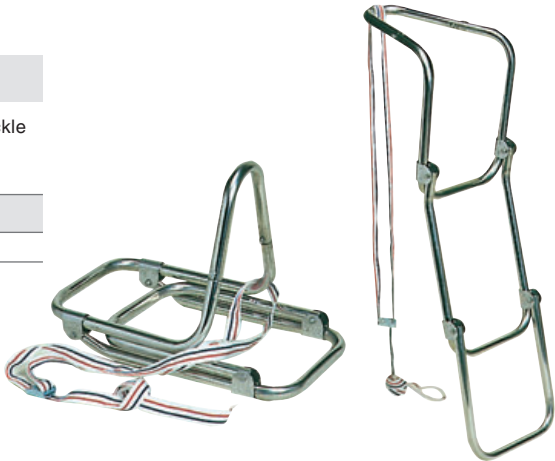

Temporary boarding ladder

Made of blue **nylon cord**, fitted with **polycarbonate** steps.

Code	Steps	Steps mm	Rope Ø mm	Length mm
49.524.03	3	300x110x40	12	940
49.524.04	4	300x110x40	12	1140
49.524.05	5	300x110x40	12	1340
49.524.10	10	300x110x40	12	3000 + rope

