

Emergency ladders

Emergency ladder

To be fastened to the pushpit. In a man-overboard situation, pull the pull cord on the protective covering and unroll the ladder to climb aboard; ideal for solo sailors.

Code	Covering		ladder mm		Steps
	mm	Colour	length when open	Width	
49.523.03	35x23x5	white	940	300	3
49.523.04	35x23x5	white	1140	300	4
49.523.05	35x23x5	white	1340	300	5
49.523.10*	35x23x5	white	3000 + rope	300	10

* In compliance with ISO15085


OSCULATI



Recess-fit 3-step emergency ladder

Watertight thermopolymer housing. Ladder with nylon braid structure and highly resistant thermopolymer steps. To be installed above the waterline. Very simple to use: in a man-overboard situation, the crew member in the water pulls the locking cap ring to let the ladder out of its housing. Sold in display package.


Code	Fixing	Steps	Length cm	cm				OPTIONAL replacement cap
				A	B	C	D	
49.522.03	Front screws	3	110	100	58	225	-	49.522.14
49.522.13	Rear nut	3	110	80	58	185	52	49.522.14

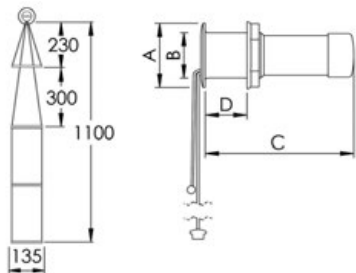

Instructions



OSCULATI

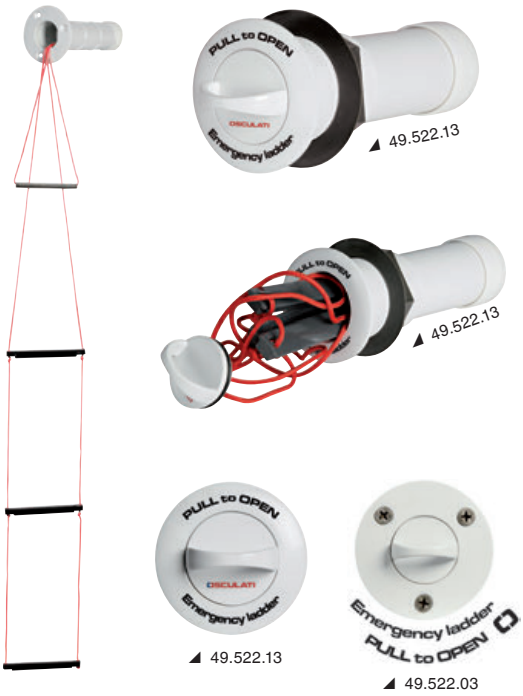


Recessed emergency ladder suitable for ISO 15085 and ABYC H-41 standards

Ladder to be used to climb back onboard in case of emergency.

- Watertight and reinforced ASA housing.
- Pull-out cover to open the ladder.
- Polyester tape ladder with stiff steps.
- FLUO stripe on the steps for better visibility at night.

Code	ladder mm		Colour	Steps
	length when open	step width		
49.525.00	2400	250	white	7

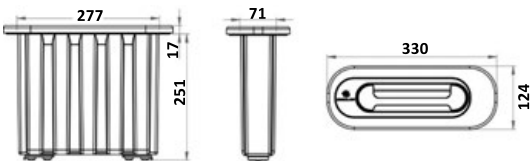

OSCULATI

