


# Household appliances for pleasure boats

#### DOMETIC air-recirculation cooker hood

 $\label{lem:air-recirculation} Air-recirculation cooker hood with activated carbon air filter. Washable filter, 2-speed fan, 2 x 10W integrated halogen spotlights.$ 

Code	v	Suction	Current draw	Lights	←→  <sub>mm</sub>	ķo.	Spare activated carbon filter
50.236.13	12	38/45 m <sup>3</sup> /h	5 W	2x10 W	400x280x56 (H)	2.2	50.236.15



# **D** Dometic



### WAECO Power-vac battery-operated portable vacuum cleaner

12V 2.6A battery-operated vacuum claner. 3.8-litre capacity, 18-minute ( $\pm$  10%) uninterrupted operation. Cleaning power: approx. 400-mm water column ( $\pm$ 10%).

Code	V	Duration	Rechargetime	←→  <sub>mm</sub>
50.848.00	12	18 (± 10%)	10/14 hours	298x171x175





#### DOMETIC central vacuum cleaner

It can be flush mounted into the bulkhead. Suction power: 2500 mm ( $\rm H_2O$  column). The system includes: 12-m suction hose, brushes and crevice tool. Efficient and hypoallergenic triple filter. Triple filter efficient and hypoallergenic.

Code	v	Power W	l←→l <sub>mm</sub>
50.851.01	220	950	298x171x175





## Water heaters and accessories

#### **Boat Boiler by ATI**


Bivalent operation **bivalent** with heat exchanger or electric resistance of 1250 W at 230 V. (on request, boiler with 110V resistance for US markets). Enhanced insulation between tank and casing in expanded polyurethane, to keep water at temperature for at least **123 hours**. Oversized heat exchanger **surdimensionato** that delivers a practical performance far superior to double capacity competing products. Installation both horizontal and vertical. Safety valve calibrated at 4 bar, test pressure 8 bar.

**Model A) Fitted** with **porcelain glass** boiler and **aluminium** external coat. Cathodic protection with magnesium anode. Enameled heat exchanger.

**Model B)** Fitted with **AISI316 stainless steel** boiler and **mirror polished inox-like aluminium** external coat. **Stainless steel** heat exchanger. With front exhaust tap. Installation on three axes possible.





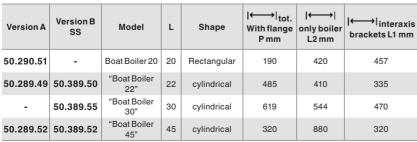



50.289.54Spare anode, for all mode



