

New**12V Mini boat boiler**


Mini boiler for boats in AISI 316L stainless steel, impact-resistant, with thermal insulation in polyurethane foam. Equipped with an incoloy heating element and a probe sheath that allows the water temperature inside the boiler to be detected via thermostat. Supplied with safety valve and adjustable brackets.

Code	Volume litres	V	W	↔ LxØ mm	kg
50.589.06	6	12	300	459x190	4.1

**New****ATI 12V boat boiler****12V**

Boiler designed for 12V applications. Made of AISI 316 L stainless steel. Large surface heat exchanger for efficient hot water production. Polyurethane foam insulation, free from toxic agents. Built-in dual thermostat and safety valve. Pre-painted aluminum cover and stainless steel brackets for sturdy installation.

Code	Volume litres	V	W	Max pressure bar	↔ LxØ mm	kg
50.489.22	22	12	300	7	520x320	7.5



Portable fridges

Powerbox® Plus 28L portable electric cooler


Click-and-lock lid and folding handle. Antimicrobial liner to resist odours, mould and mildew. It keeps the content 20°C below the ambient temperature. For 1.5-l bottles. 12V/230V power supply.

Code	Capacity l	↔ mm
50.171.32	28	410x310x470

**ISOTHERM compact and portable built-in refrigerator/freezer**

Compact and portable refrigerator/freezer with Secop BD Micro compressor. 12/24-volt supply. 35-watt consumption. Temperature adjustable by means of a thermostat. Made with stainless steel materials.

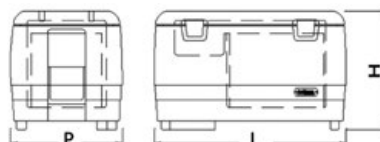
Code	Model	Capacity l	↔ (HxLxP) mm	kg
50.832.28	TB18	18	405x235x565	8.6

**Travel box portable cool box**

Portable refrigerators with freezer capability, designed for outdoor use and to withstand violent movements. Temperature control thermostat. Constructed entirely from stainless materials. Power supply 12/24V.

Code	Model	Capacity l	Current draw* (W/24h)	↔ (HxLxP) mm	Secop compressor type	kg
50.832.32	TB 31 DC	30	220 - 740	380x585x350	BD35F	18
50.832.42	TB 41 DC	40	250 - 790	445x585x350	BD35F	21
50.831.07	TB 51 DC	50	240 - 770	530x585x350	BD35F	23

*Energy consumption when operating at 12V, +5°C in the refrigerating compartment, +25°C room temperature

**isotherm**