




Occhioli preisolati

Codice	Cavo mm ²	Apertura mm	
14.186.61	1/2,5	4,3	100
14.186.62	1/2,5	5,3	100
14.186.71	2,5/6	5,3	100
14.186.72	2,5/6	6,4	100



Faston preisolati da 4,7 mm, 6,3 mm e 9,5 mm

Codice	Tipo	Cavo mm ²	Apertura mm	
14.185.45	Femmina	1/2,5	4,7	100
14.185.46	Maschio	1/2,5	4,7	100
14.185.50	Femmina	1/2,5	6,3	100
14.185.60	Maschio	1/2,5	6,3	100
14.186.11	Femmina	2,5/6	6,3	100
14.186.20	Maschio	2,5/6	6,3	100
14.186.30	Femmina	2,5/6	9,5	50



▲ 14.185.50/45





▲ 14.185.60/46; 14.186.20



▲ 14.186.30/11

Faston completamente preisolato da 4,7 mm e 6,3 mm

Codice	Tipo	Cavo mm ²	Apertura mm	
14.185.54	Femmina	1/2,5	4,7	100
14.185.55	Femmina	1/2,5	6,3	100
14.186.06	Femmina	2,5/6	6,3	100
14.185.65	Maschio	1/2,5	6,3	100
14.186.24	Maschio	2,5/6	6,3	100





▲ 14.185.54/55; 14.186.06




▲ 14.185.65; 14.186.24

Faston preisolati con termoretraibile a tenuta stagna da 6,3 mm

Codice	Tipo	A mm	B mm	C mm	D mm	Cavo mm ²	
14.798.01	Femmina	6,35	0,8	28	4,9	1,2/2,5	100
14.798.02	Maschio	6,35	0,8	28	4,9	1,2/2,5	100




▲ 14.798.02




▲ 14.798.01


Piggy-Back faston doppio preisolato da 6,3 mm

Codice	Cavo mm ²	Faston abbinabili	
14.186.26	1/2,5	14.185.50; 14.185.60; 14.185.55	50



Terminali preisolati cilindrici


Codice	Tipo	Cavo mm ²	Ø mm E	Ø mm i	
14.186.43	Maschio	1/2,5	4	-	100
14.186.44	Femmina	1/2,5	4	-	100
14.186.47	Maschio	2,5/6	5	3,86	100
14.186.48	Femmina	2,5/6	5	4,85	50

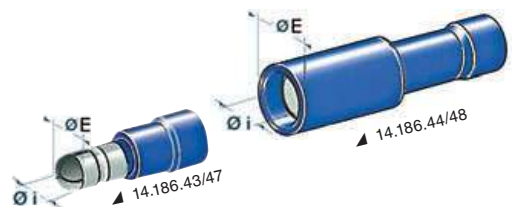


▲ 14.186.43/47

▲ 14.186.44/48

Spinotti maschio + giunzioni femmina preisolati

Codice	Tipo	Cavo mm ²	
14.186.81	Femmina	1/2,5	100
14.186.83	Femmina	2,5/6	50
14.186.91	Maschio	1/2,5	100
14.186.92	Maschio	2,5/6	100

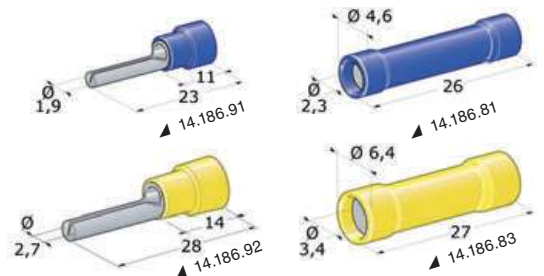

▲ 14.186.91

▲ 14.186.81

▲ 14.186.92

▲ 14.186.83