


Terminali rapidi per rig in tessile



Terminali ad occhio per rig tessile

ROPE LINE In acciaio inox 316 lucidato


Codice	Cime Ø mm	↔ mm				Carico di rottura Kg
		A	D2	D3	L1	
05.220.04	4	5	8,5	8	45	1900
05.220.05	5	6	10,5	12	58,5	3200
05.220.06	6	9	13	14	71	5500

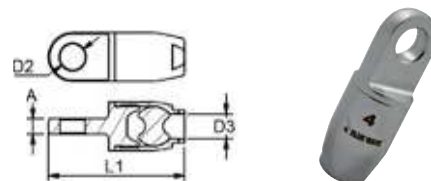

Terminali a forcella per rig tessile

ROPE LINE In acciaio inox 316 lucidato.


Codice	Cime Ø mm	↔ mm				Carico di rottura Kg
		A	B	C	L1	
05.221.04	4	6,5	16	9	53	1900
05.221.05	5	9	21	11	67	3200
05.221.06	6	11	26	13,5	83	5500

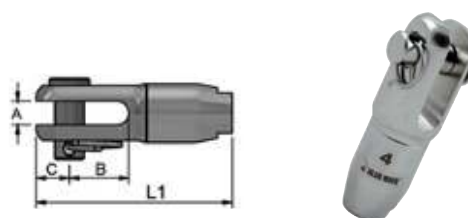

Terminali filettati per rig tessile

ROPE LINE In acciaio inox 316 lucidato.

Codice	Cime Ø mm	↔ mm			Carico di rottura Kg
		G	L1	L2	
05.222.04	4	5/16"	95	57	1900
05.222.05	5	3/8"	111	63	3200
05.222.06	6	7/16"	126	68	4600

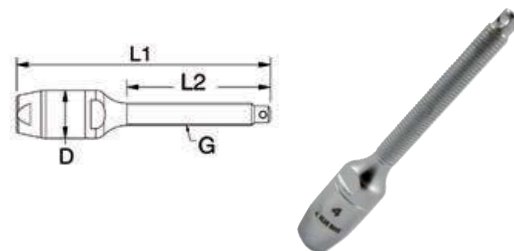


Sistema per draglie in tessile

ROPE LINE In acciaio inox 316 lucidato.


Codice	Descrizione	Per cima Ø mm	Filetto	Perno Ø mm	Carico di rottura Kg
05.230.01	Tenditore con canala aperta cromata	4	5/16"	8	1700
05.230.02	Moschettone a singolo scatto	-	M6	-	500
05.230.03	Terminale filettato per tessile da abbinare a moschettone 05.230.02 e/o tenditore 05.230.01	4	M6	-	1100
05.221.04	Terminale a forcella	4	-	8	1900
05.231.00	Passaggio Nylon x fori da 10 mm	-	-	-	-



▲ 05.230.01



▲ 05.230.01




▲ 05.230.03



▲ 05.230.02

▲ 05.230.03

▲ 05.221.04




▲ 05.221.04



▲ 05.231.00



▲ 05.231.00



▲ 05.231.00



▲ 05.230.02/03