

LEWMAR Evo winches

LEWMAR Evo self-tailing winch


An evolution of the excellent products of the Ocean series, the Evo winch series features several improvements allowing to offer a **smaller size** winch with equal strength and the **same excellent grip** without saving on materials. To be installed with pins or studs. Available in manual, electric and/or hydraulic version. **7-year warranty.**



Model	Code	Bell material		Gear ratio crank bell 1		Ratio of applied transmitted force 1		Base Ø mm	Height mm	Line Ø mm
				1	2	1	2			
15ST	68.103.15	Grey aluminium*	2.3	2.0:1	-	15.8:1	-	121	115	6 - 10
15ST	68.104.15	Black aluminium	2.3	2.0:1	-	15.8:1	-	121	115	6 - 10
15ST	68.113.15	Chromed bronze	3.9	2.0:1	-	15.8:1	-	121	115	6 - 10
30ST	68.103.30	Grey aluminium*	4.2	2.0:1	4.2:1	13.8:1	29.2:1	138	146	8 - 12
30ST	68.104.30	Black aluminium	4.2	2.0:1	4.2:1	13.8:1	29.2:1	138	146	8 - 12
30ST	68.113.30	Chromed bronze	5.6	2.0:1	4.2:1	13.8:1	29.2:1	138	146	8 - 12
40ST	68.103.40	Grey aluminium*	4.9	1.9:1	5.8:1	13.2:1	40.2:1	148	158	8 - 12
40ST	68.104.40	Black aluminium	4.9	1.9:1	5.8:1	13.2:1	40.2:1	148	158	8 - 12
40ST	68.113.40	Chromed bronze	6.5	1.9:1	5.8:1	13.2:1	40.2:1	148	158	8 - 12
45ST	68.103.45	Grey aluminium*	7.2	2.4:1	7.6:1	13.9:1	44.8:1	168	178	8 - 14
45ST	68.104.45	Black aluminium	7.2	2.4:1	7.6:1	13.9:1	44.8:1	168	178	8 - 14
45ST	68.113.45	Chromed bronze	9.7	2.4:1	7.6:1	13.9:1	44.8:1	168	178	8 - 14
50ST	68.103.50	Grey aluminium*	8.8	2.6:1	13.9:1	13.9:1	48.6:1	181	197	8 - 14
50ST	68.104.50	Black aluminium	8.8	2.6:1	13.9:1	13.9:1	48.6:1	181	197	8 - 14
50ST	68.113.50	Chromed bronze	12.1	2.6:1	13.9:1	13.9:1	48.6:1	181	197	8 - 14
55ST	68.103.55	Grey aluminium*	12	2.8:1	13.8:1	13.8:1	54.0:1	205	237	8 - 16
55ST	68.104.55	Black aluminium	12	2.8:1	13.8:1	13.8:1	54.0:1	205	237	8 - 16
55ST	68.113.55	Chromed bronze	17	2.8:1	13.8:1	13.8:1	54.0:1	205	237	8 - 16

* Material to be ordered. Approx. lead time: 6 weeks.

LEWMAR Ocean winches

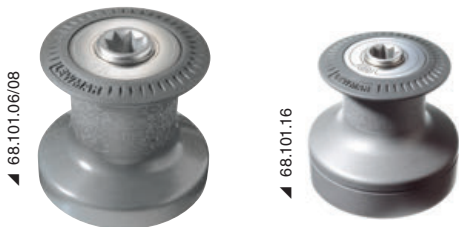

LEWMAR Ocean winches

LEWMAR standard winches are a point of reference in technological innovation designed to provide high performance and unmatched durability. Fitted with anthracite anodized aluminium drum.

Code	Model	Speed	Handle/drum rev. ratio	Power ratio		Base Ø mm	Fixing
68.101.06	6	1	1:1	6.8:1	0.5	94	4 x M6 screws
68.101.08	8	1	1:1	7.9:1	1.4	108	5 x M6 screws
68.101.16	16	2	1:1	16:1	2.1	120	5 x M6 screws

LEWMAR oversized gearmotor

Code 68.142.12
Boosted motor for EVO 45 and 50 winches: the power switches from 700W to 1000W. The new motor powers higher pull capacities and faster line speeds. Ideal for 2:1 mainsail halyards, oversized masts, Gennaker and Code 0. Pre-wired with solenoid version E (already equipped with control electronics)

