

Pad-Eye foldable rings


OSCULATI


FLUSH DECK power point

AISI 316

High-resistance power point suitable to fasten rafts, inflatables, etc. on deck or platforms. or to fasten lifelines or other on sail boats. Mirror polished AISI 316 stainless steel.

Code	A mm	B mm	C mm	Breaking load kg
39.865.00	70	60	21	1100



Electro-polished foldable half-rings

Very thick (2.85 mm) stainless steel plate and counterplate (1.42 mm).

Code	Base mm	Ring section mm	anello mm
39.868.06	58x50	6	51x39
39.868.08	58x50	8	56x43



▲ 39.866.80/81

▲ 39.866.85


▲ 39.866.86/87/88

Foldable stainless steel rings

AISI 316

Also designed as strength points; **AISI 316** stainless steel base, excellent corrosion resistance, it can bear heavy loads, vibration-dampening **rubber** washers.

Code	Breaking load kg	Base mm
39.866.80	1500	with 3 holes 48x49
39.866.81	2200	with 3 holes 65x64
39.866.85	1500	Depresses bollard, 48x49
39.866.86	900	with 4 holes 45x45 mm
39.866.87	1500	with 4 holes 51x5 mm
39.866.88	3000	with 4 holes 76x76 mm

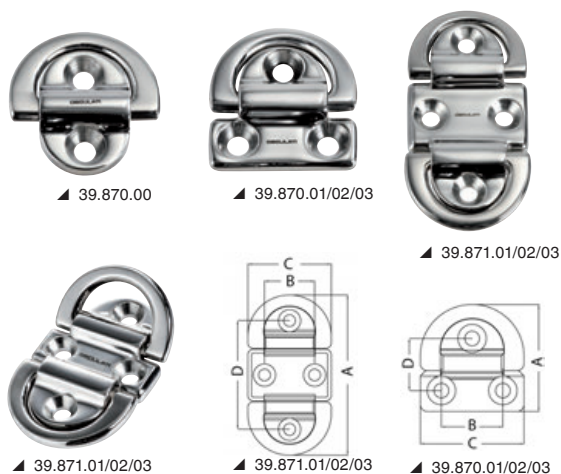OSCULATI


▲ 39.870.00

▲ 39.870.01/02/03

▲ 39.871.01/02/03

▲ 39.871.01/02/03

▲ 39.871.01/02/03

▲ 39.870.01/02/03


Folding pad eyes with HR forged eye

AISI 316

Mirror-polished pad eyes with full forge eye for maximum mechanical strength. Fitted with anti-vibration rubber. It comes in a recyclable display package showing breaking load values. Same centre distance as Wichard having similar dimensions.

FORGE RING

Code	Type	mm				Ø ring section mm	Ø screws mm	Breaking load kg
		A	B	C	D			
39.870.00	Single, small, 2 bores	46	-	45	23	6	6	1800
39.870.01	Single, small	47	27	45	25	6	6	2200
39.870.02	Single, medium	61	35	59	30	8	6	4000
39.870.03	Single, large	77	46	75	40	10	6	7000
39.871.01	Double, small	87	27	45	60	6	6	3600
39.871.02	Double, medium	99	35	59	60	8	6	6800
39.871.03	Double, large	126	45	75	79	10	6	12000



▲ 39.870.00


OSCULATI


Square pad eyes with HR folding forged eye

AISI 316

Mirror-polished square pad eyes with full forge eye for maximum mechanical strength. Fitted with anti-vibration rubber. It comes in a recyclable display package showing breaking load values. Same centre distance as Wichard having similar dimensions.

FORGE RING

Code	Type	mm				Ø ring section mm	Breaking load kg
		A	B	C	D		
39.873.01	Square Small	57	27	45	23	6	2700
39.873.02	Square Medium	75	35	60	30	8	5100

