

### AUTOTERM diesel-powered air heater

Autoterm air heaters are independent, diesel-powered heating systems that can be easily installed on your boat or vehicle.


They are excellent products for spaces which need to be heated or dehumidified quickly. Equipped with built-in fail-safe systems and sensors that will automatically shut down the heater if any errors occur.

automatically the heater in case of detected errors.

Accessories included:

- Fuel pump cable with connector;
- Air suction tube with silencer;
- 1.8-m control panel cable.
- Cable for control panel 1.8 m;
- Thermal insulation Ø 24 mm;
- Silencer/exhaust with mounting kit;
- Drain pipe 1 m (optional adapters: 50.255.01/02/03);
- Nylon fuel hose, 1.5 m;
- Mounting bracket.

Code	Model	Recommended for boats (m)		V	Power kW	Heating capacity m <sup>2</sup> /h	←→ mm	kg
		Mediterranean climate	Nordic climate					
50.252.12	AIR 2D	8-10	7-9	12	2	86	310x119x145	2.9
50.254.12	AIR 4D	10-12	8-10	12	4	168	402x157x188	5.5
50.254.24	AIR 4D	10-12	8-10	24	4	168	402x157x188	5.5

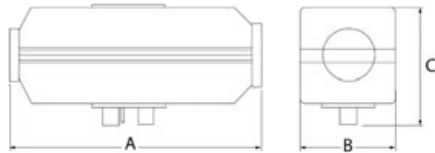

### AUTOTERM installation and air distribution kit for air heaters

To install a heater, choose an air distribution kit depending on the type of burner chosen and the number of air vents you wish to install.

The kits include all the accessories needed for installation.

Code	Heater	Out-lets	Open outlets	Adjustable and closable outlet	Connectors		←→ tubo	
					in Y-shape	in T-shape	Length m	Ø mm
50.252.62	AIR 2D	2	1	1	1	-	5	65
50.252.63	AIR 2D	3	1	2	1	-	8	65
50.254.63	AIR 4D	3	1	2	1	1	8	90
50.254.64	AIR 4D	4	1	3	2	1	10	90



### AUTOTERM control panel for air heaters

Digital or analogic control panels are available depending on the requirements. The extension cord is compatible with both versions.

Max length of the compatible cable: 11.8 metres (5 m + 5 m + 1.8 m already included).

Code	Control panel	Language	5 m cable extension OPTIONAL
50.251.11	Analogic	ALL	50.251.12
50.251.01	Digital	EN-DE-PL	50.251.12



▲ 50.251.01



▲ 50.251.12



▲ 50.251.11